

SUMITOMO

SUMITOMO
P A V E R S

Sumitomo Asphalt Paver
J-PAVER

HA60C-11
HA60W-11
EU Stage V



 **SUMITOMO CONSTRUCTION
MACHINERY CO., LTD.**

731-1 Naganumahara-cho, Inage-ku, Chiba, 263-0001 Japan

For further information please contact :

Phone : +81-43-420-1829 Facsimile : +81-43-420-1907

<https://www.sumitomokenki.com/>

We are constantly improving our products and therefore reserve the right to change designs and specifications without notice.
Illustrations may include optional equipment and accessories and may not include all standard equipment.



MIX
Paper from
responsible sources
FSC® C017928



Paving the way. With our way.

Outstanding Universality & Convenience.

The new generation of HA60 is developed with Sumitomo's expertise spanning more than six decades, and meets the latest EU Stage V emission standards.

SUMITOMO Pavers are designed under the concept of the following 3 points and manufactured with high quality.

Human Friendly

Eco Friendly

Repair Friendly


HA60C-11

2.3 m to 6 m

WORLD FIRST


Infinitely variable triple screed

The J.Paver 2360 uses an enhanced frame structure to improve rigidity significantly, for more consistent and reliable paving operations.

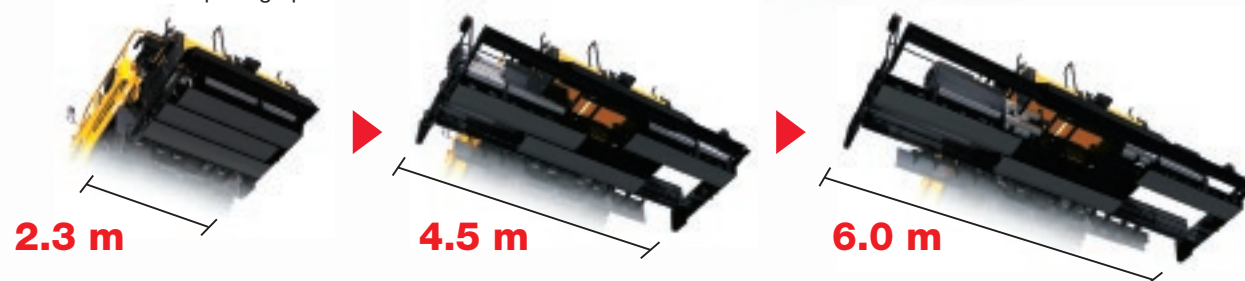

Double role

The J.Paver 2360 covers two conventional screed ranges.

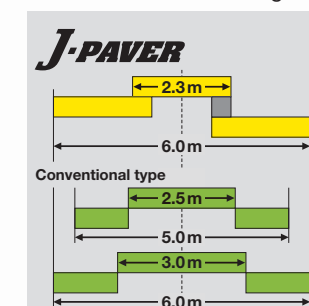

Within 2.5 m transportation width



Easy transportation

The HA60-11 can be completely loaded onto a 2.5 m-wide trailer and paving can be started without having to assemble any parts.



HA60W-11

Powerful & ECO


20% more power with the same fuel consumption
(compared to the HA60-8B)

Powerful and ECO

High-power torque and low fuel consumption engine **New**

The power system, a combination of the newly developed intelligent YANMAR engine and SUMITOMO's cutting-edge technology, delivers high work efficiency and low fuel consumption. The YANMAR-4TN107 meets EU Stage V emission standards.

©YANMAR-4TN107
(Single turbo + Intercooler)

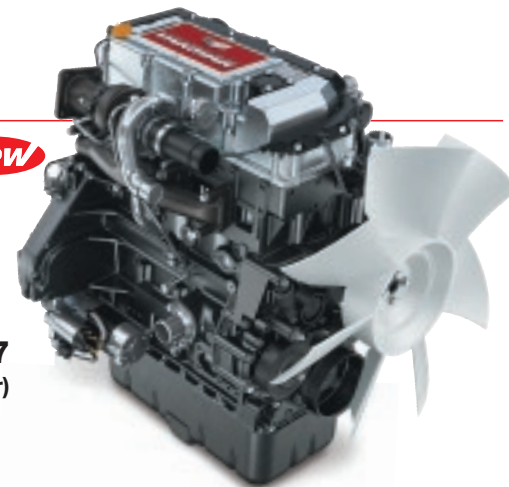

SCR System


The Selective Catalytic Reduction System is one of the most cost-effective and fuel-efficient technologies for injecting AdBlue® (urea water) into the exhaust, where NOx undergoes a chemical reaction and converts exhaust gases into harmless nitrogen and water. Post-processing NOx results in more efficient engine combustion, thereby improving fuel efficiency and power generation.

AdBlue® is registered trademark of the German Association of the Automotive Industry.

How the SCR system works

The SCR system comprises the oxidation catalyst, SCR catalyst, urea water injection unit and other devices. The first stage involves purifying PM in the exhaust by the oxidation catalyst. Urea water is then injected into the exhaust gas, and the action of ammonia in the urea water and the SCR catalyst reduces NOx to harmless nitrogen and water, resulting in clean exhaust gas.

SCR (Selective Catalytic Reduction) System

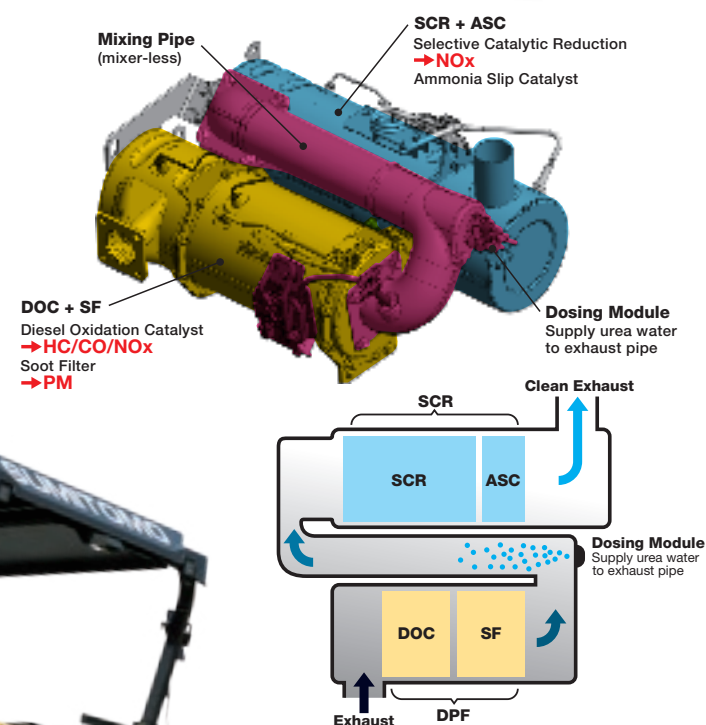

HA60W-11




HA60C-11

Outstanding Convenience

New type of heating device **New**


The system provides excellent heating performance with the use of new flat-type heating device.

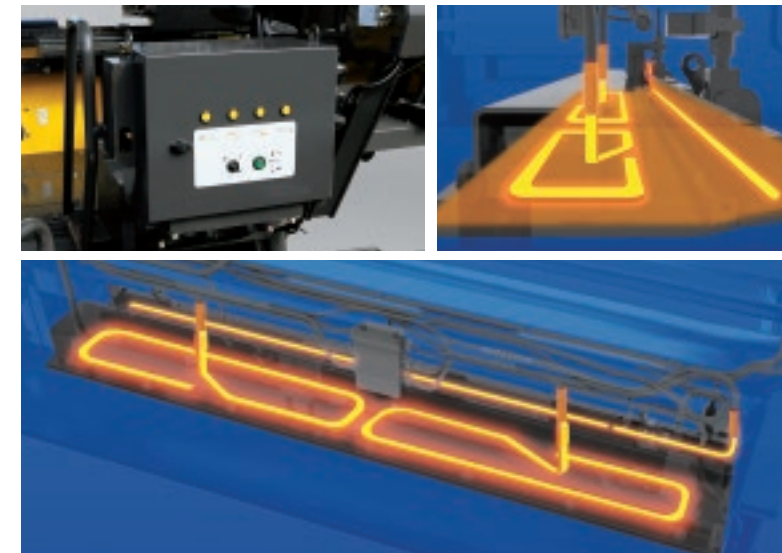

The flat design ensures greater contact with the screed plate


Heating generator without daily maintenance **New**

The change from a belt drive to a direct motor drive generator eliminates the need for daily belt adjustments.

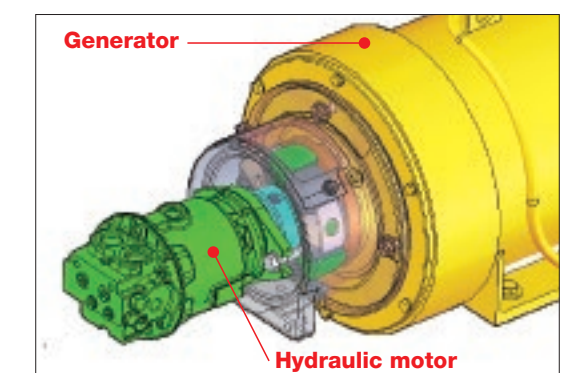

Extendable mold board (powered type)


The extendable mold board extends together with the screed, and cuts off the material to avoid over capacity in front of the rear screed. It also carries material smoothly to the end of the screed.

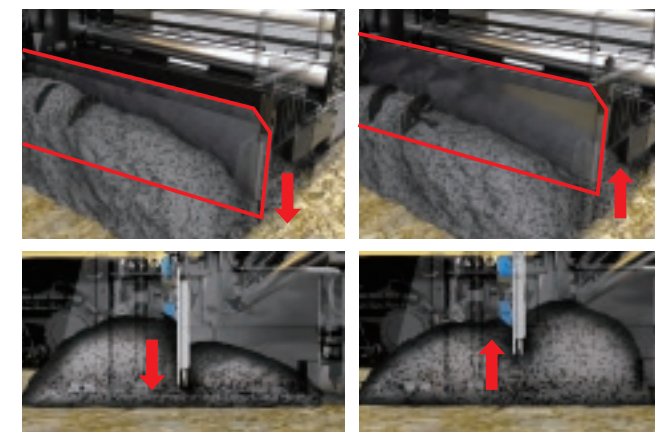

Hydraulic height adjustment


Height of extendable screeds

When a difference in surface height occurs between front and rear screeds, it can be adjusted by just a flick of a switch.

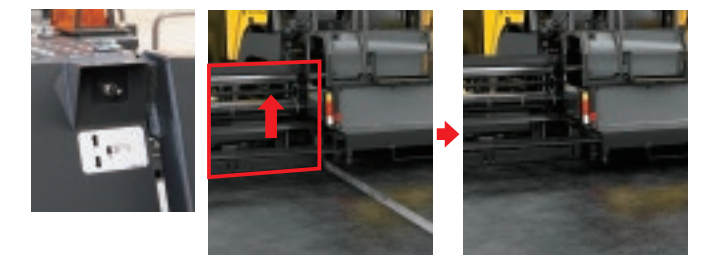

Crown adjustment

The slope from center to side can be adjusted by a switch on the hydraulic crown device.

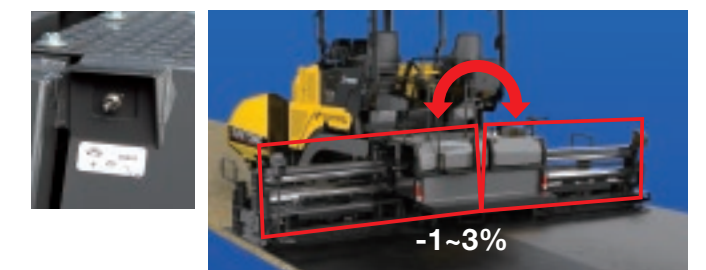


-1~3%

High Performance & Quality


STV compaction system

Features Sumitomo's original Strike-off + Tamper + Vibrator combination system. The strike-off transfers material to the tamper smoothly, and the tamper and vibrator layout provides sufficient compaction.

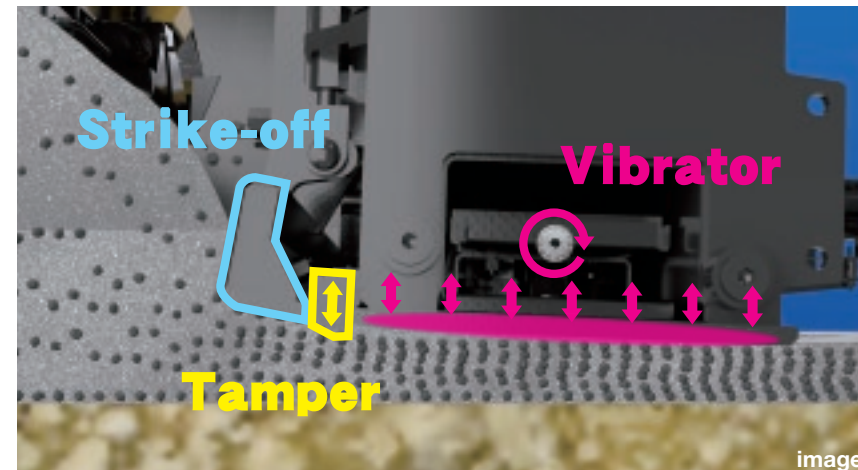


Automatic screed lock

When the automatic lock device is activated, the screed lift cylinder prevents (holds) the screed from sinking into the surface when the machine stops.

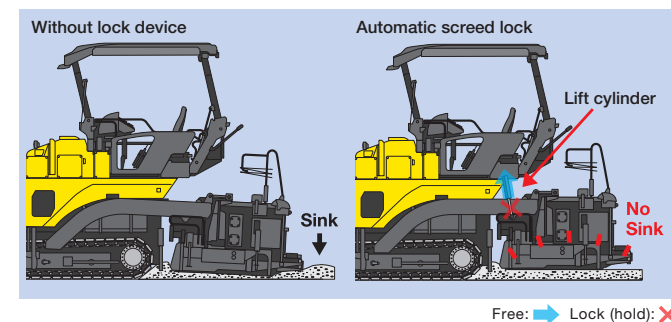



Anti-climb lock

When the anti-climb lock device is activated, the screed lift cylinder prevents (holds) the screed from floating up to the surface when the machine re-starts.

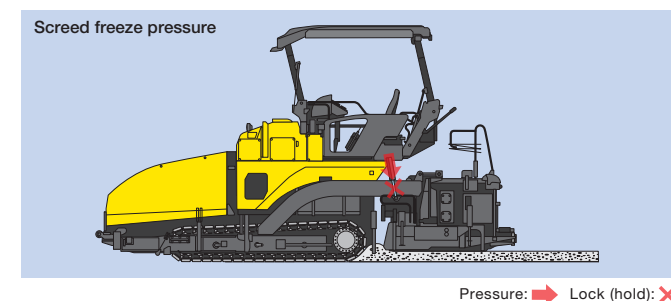

Automatic tamper speed setting **New**

When using the automatic mode, the system will automatically set the tamper speed appropriate to the paving speed. In addition, the tamper speed can be adjusted manually. Switch between automatic or manual mode via the display screen.

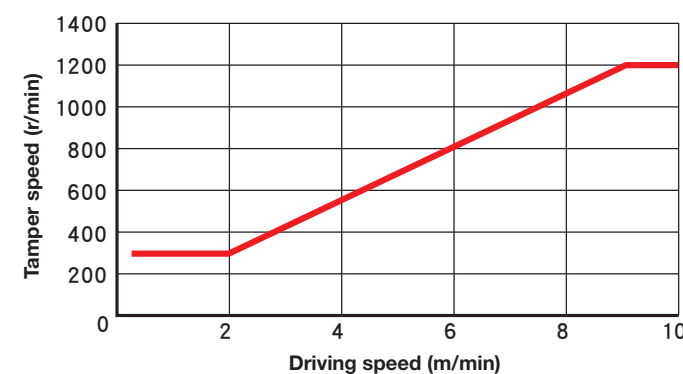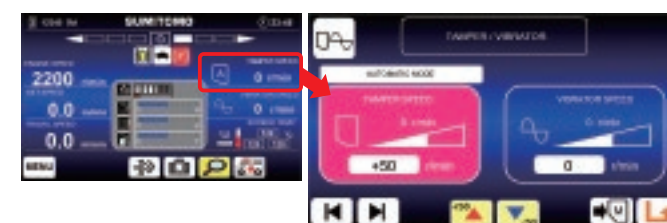

Material Supply System

New hopper shape

The new shape helps supply material to the conveyor easier.



The hopper front apron is operated by two hydraulic cylinders, which keeps material inside the hopper and prevents it from spilling onto the ground.




Individual operating hopper wings

This function is useful to avoid obstacles on the road. It also allows for operation depending on the volume of material.



Auger height adjust switches

The height of the auger can be adjusted hydraulically according to the paving thickness. Adjustment switches are located on the operator console and behind the screed arms.

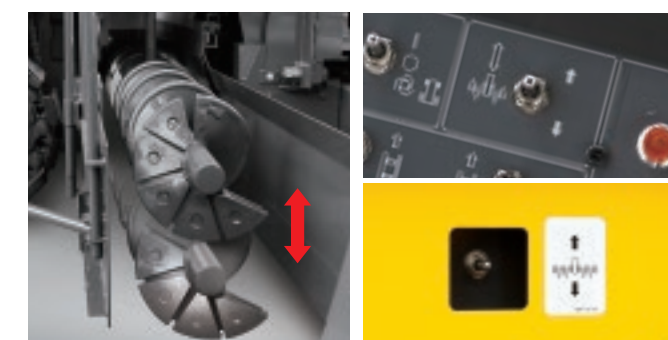

Reversible auger and conveyor (individual Left & Right operation)

A perfect balance of material in front of the screed can be achieved by this function.



Oscillating push roller

When paving a curved road, the push roller is contacting the tire of the dump truck constantly.



Greater Traction & Stability with Crawler Type HA60C-11

HA60C-11



New operator console layout


Switches for each operation and function are conveniently configured on the new ergonomic operator console. The operation panel is equipped with a full-color display, which is designed for ease of use. In the event that the screed console is faulty, the main operator console in front of the driver's seat can also be used for operations.



- A** Emergency travel control
- B** Screed control
- C** Hopper
- D** Auto leveling mode
- E** Auger height adjustment
- F** Conveyor control
- G** Auger control
- H** Steering control
- I** Engine control
- J** Travel control

Advanced control system

The engine, hydraulic pumps, and traveling motor are centrally controlled with fine precision by the computer. In addition, settings are stored in the computer's memory, so paving can be carried out simply by turning the traveling switch to "on" or "off". Sumitomo's latest feedback system delivers superior traveling stability (by maintaining the set speed and course).

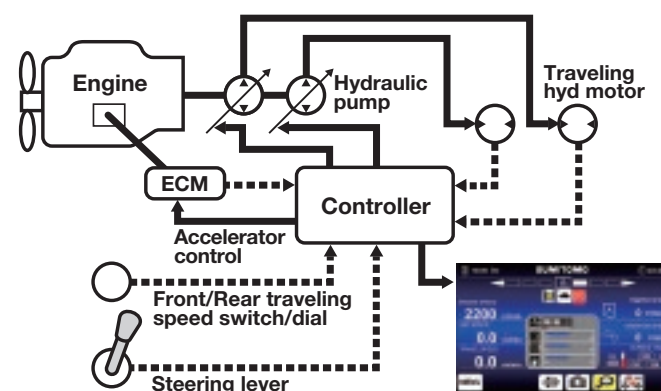

In-shoe motor

The drive motors are mounted inside the shoe and connected directly via sprockets, eliminating chain backlash. This design ensures strong road surface traction capabilities.




Smoother finish achieved with superior surface contact

The oscillating bogie absorbs impacts from uneven road surfaces, such as those created by manholes.




Smooth steering

The machine can automatically control the speed difference between the left and right tracks for smoother turns with a certain curve radius. Both tracks are driven at the same time, even when turning, for better traction and climbing performance.

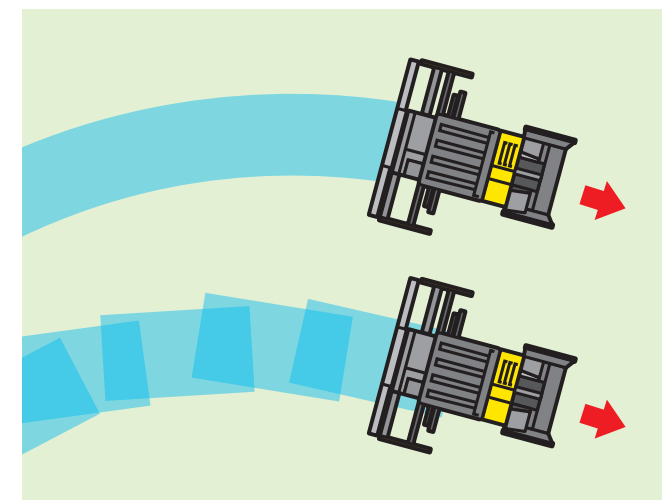

Spin turn

This function makes it possible to turn on the spot, which is useful on cramped work sites. Dead-ends and corners can also be paved smoothly, and the machine can be withdrawn laterally.

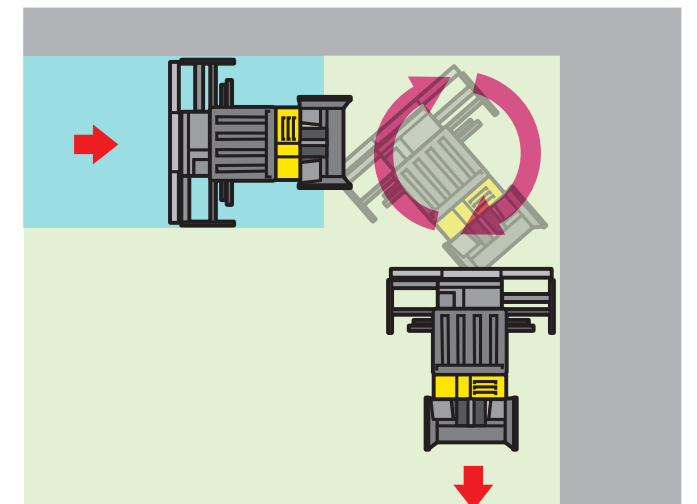

Self-centering direction stick **New**

The operating direction stick automatically returns to its neutral position after release to prevent operating errors. The fine-tuning steering knob is convenient for when paving around curves.



Foldaway retaining plate

Extremely useful for feeding materials outward smoothly. The plate is stowed completely within the machine width.



Crawler blade (option)

The crawler blade scrapes off spilt material in front of the shoe.



Link-shoes with durable rubber pads

Durable rubber pads are installed on the link-shoes to prevent damage to the asphalt surface.



Greater Mobility & Transportability with Wheel Type HA60W-11

HA60W-11

New operator console layout


Switches for each operation and function are conveniently configured on the new ergonomic operator console. The operation panel is equipped with a full-color display, which is designed for ease of use. In the event that the screed console is faulty, the main operator console in front of the driver's seat can also be used for operations.



- A** Emergency travel control
- B** Screed control
- C** Hopper
- D** Auto leveling mode
- E** Auger height adjustment
- F** Conveyor control
- G** Auger control
- H** Steering wheel
- I** Engine control
- J** Diff-lock
- K** Travel control


Short turning radius & improved transportability

The total length of HA60W-11 is shortened by 340 mm compared to the previous model. The compact body makes the transportation much easier. The braking steering as a standard function enhances turning performance.

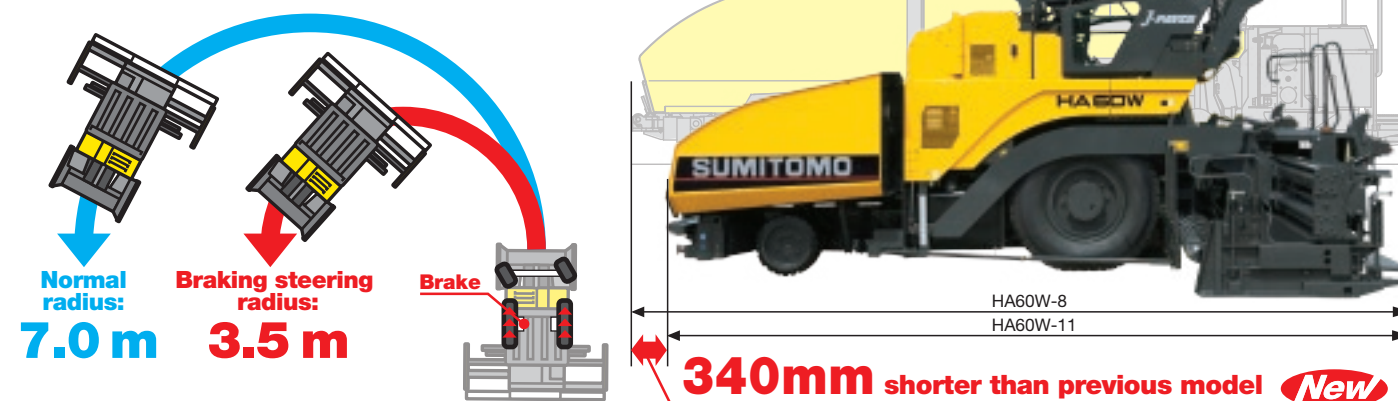

4WD parallel drive system

The parallel driving system prevents the front wheels from slipping to make starting smoother. Furthermore, the speed feedback system maintains driving speed without being affected by the material load, and powerful traction force is provided while paving.

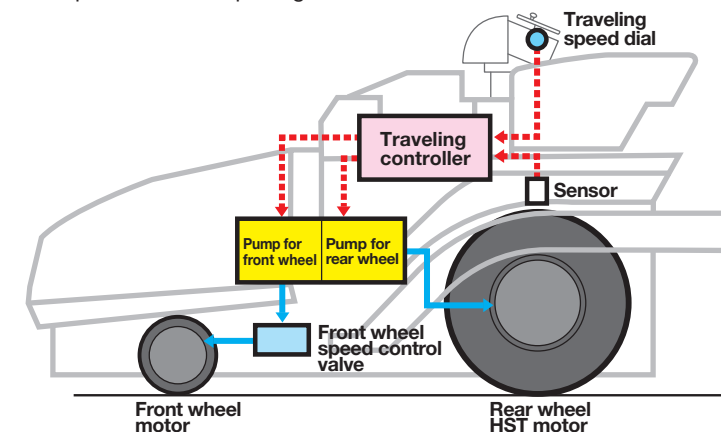

Two modes of travel speed

- High-speed (0~15 km/h)*
For high-speed travel.
*Forward, backward (0~8 km/h)
- Low-speed 2WD (1.0~20 m/min)
For paving speeds with only rear-wheel drive.
- Low-speed 4WD (1.0~20 m/min)
For paving speeds with 4WD for greater traction.



In-wheel-motor

The drive motors are mounted inside the wheels, and eliminate chain backlash. This design ensures strong road surface traction capabilities.



Tires can be changed with the screed arm still attached


If a rear tire is punctured, it can be changed without removing the screed and screed arm.



Tire changing situation


Diff-lock system (option) **New**

The new developed diff-lock system prevent wheel slip, that gives much traction to keep moving force and easier to get out of the soft ground.

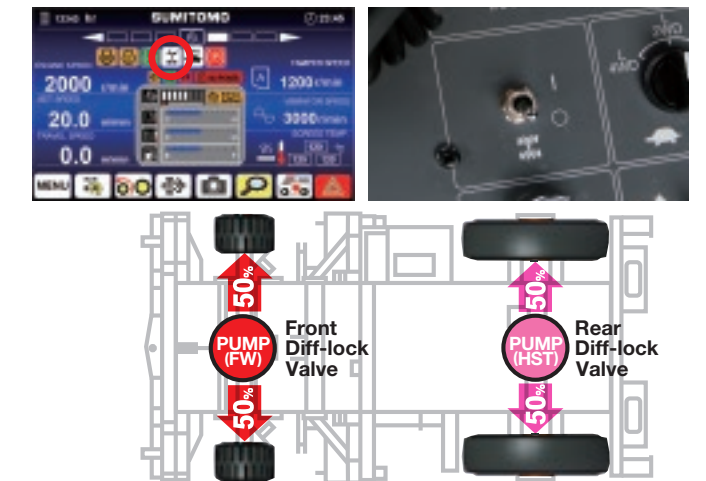

Front wheel traction control

The front wheel traction power (hydraulic pressure) can select from 4 modes depending on the paving conditions.

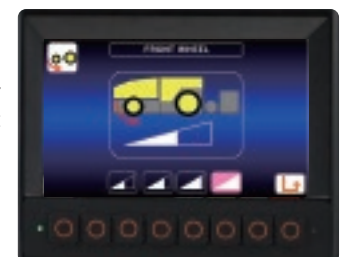

Foldaway retaining plate **New**

Extremely useful for feeding materials outward smoothly. The plate is stowed completely within the machine width.



Retaining plate storage space

The retaining plate can be stored behind the hopper wing, and the support pipe can be unraveled and stored behind the body side panel.



Retaining plate storage

Support pipe storage

Screw extension storage

Easy & Safe

Comfortable Operation

Smooth movable operator console **New**

The operator console can be moved from left to right to provide the operator with greater flexibility, with the force required for movement half that of the HA60-8B.



Smooth slide out seat **New**

The slide out seat is useful for checking the road and working conditions. The operator console can also slide to suit the seat, with the force required for movement half that of the HA60-8B. The deluxe suspension seat also adds a higher level of comfort.



Hard top canopy **New**

The new FRP (Fiber Reinforced Plastic) canopy is operated hydraulically during opening and closing.



Folding

Slide out type sunshade

With the new designed FRP Canopy, the newly slide out type sunshade is much bigger, easy to operate and gives the operator stand more comfort.



Side windshield


The newly designed side windshield prevents strong winds and helps maintain a clear field of view.




Safety

FVM (Field View Monitor) (option) **New**

Sumitomo has developed the world's first revolutionary safety device, Field View Monitor (FVM). The primary feature of the device is its ability to provide a maximum range view of 270 degrees - mostly in the front and rear of the equipment - on a full color monitor. The technology that dramatically expands the view of the operator will probably set the standard for construction sites that demand a higher level of safety.

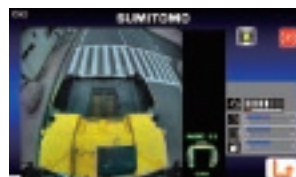

Front camera view (Photo: HA60C-11)

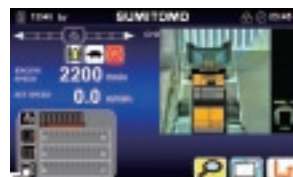


FVM screen (Photo: HA60C-11)



Front camera

Wide field of view

270° to the front!

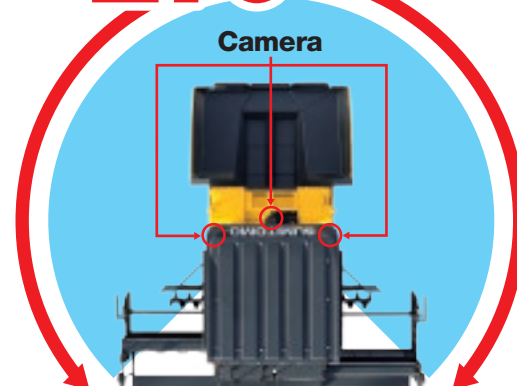

Full color display

The operator console has a 7-inch wide full-color display that is easy to read even in bright places. Most working conditions can be set through the buttons below, and machine status, maintenance and other important information can also be collected.



Normal



Menu



Maintenance



T&V adjustment



Multinational



Emergency



Emergency

Eco Mode switch

The Eco Mode switch drops the engine speed from 2,200 min⁻¹ to 2,000 min⁻¹ under light loads, which is useful for reducing fuel consumption.



Eco Mode switch

Emergency stop button

This is an emergency stop button to be pressed in case of emergency.



An icon is displayed on the monitor when the emergency stop button is activated.



New screed console with color display

Key functions are arranged on the left and right screed console, and the auger and conveyor can also be operated individually. The color sub displays indicate the performance in figures. Tamper & vibrator, heating temperature and other settings are also available with the push buttons below. Emergency stop buttons are also equipped for safety.



B' Screed control

Left and right leveling adjustment screed extend and retract, screed height adjust.

G' Auger & Conveyor control

Control material supply, Auger and Conveyor can be operated separately.




Screed control box



LED light for side and rear




LED light for front

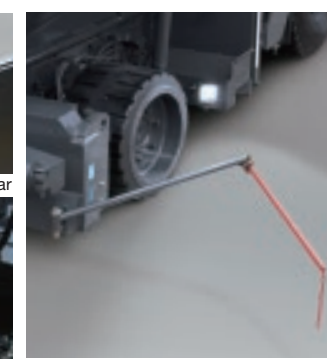


LED light for driving guide




LED light for auger



Normal



T&V adjustment







Emergency

Maintenance and Featured Options



Easy maintenance

Daily inspections are extremely straightforward. Oil and grease checks, filter changes as well as other maintenance jobs can be easily carried out just by opening the covers.

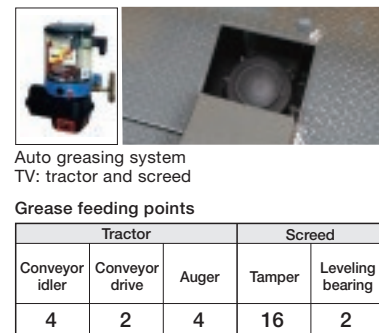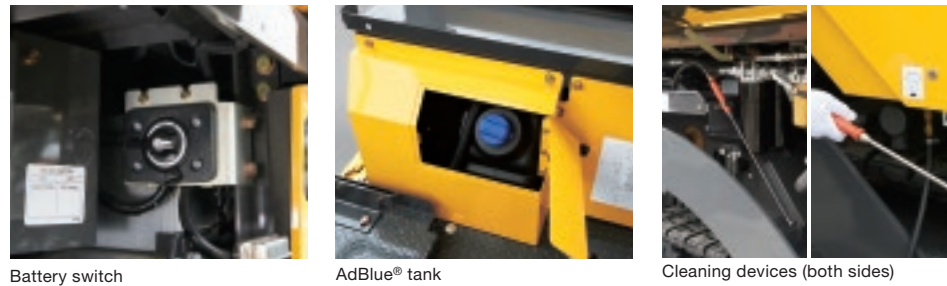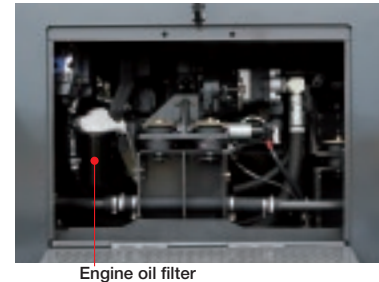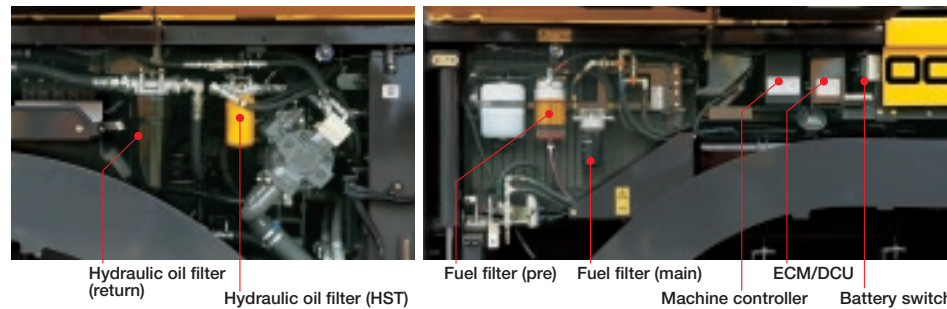

Grease feeding points				
Tractor		Screed		
Conveyor idler	Conveyor drive	Auger	Tamper	Leveling bearing
4	2	4	16	2

Emergency evacuation system (option)

If the engine or pump malfunction during paving, this function allows the machine to be moved to a safe location away from the road.




*The hydraulic hand pump can operate the cylinders of the hopper, screed extend and screed lift.

AVS (Asphalt fume Ventilation System) (option)

The hydraulic fan draws fumes from the area between tractor and screed, and blows them away upward of canopy.

Side plate heater (option)

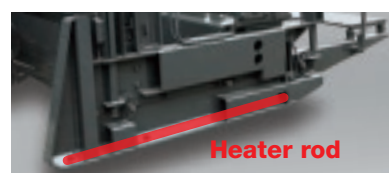

Automation for convenience

Grade sensors, slope sensors, 3D control systems and other devices for automation can be used with Sumitomo's pavers to make operations more convenient.

	Device	Type
①	Grade sensor	Contact / Ultrasonic
②	Slope sensor	Conventional / Digital
③	Big-Ski	3 / 4 Sonic
④	Material flow sensor	Auger rotation speed
⑤	3D-Machine control	GPS / Total station



Principle specifications


	HA60C-11	HA60W-11
Dimensions	Paving width	2.3~6.0 m infinitely variable
	Paving thickness	10~300 mm
	Paving speed	1~20 m/min
	Hopper capacity	12 ton
	Center crown ratio / Side slope ratio	-1~3% (Hyd.) / 0~3%
	Overall length	6,590 mm
	Overall (Transportation) width	2,490 mm
	Overall height / Transportation height	3,765 mm / 2,920 mm
	Operating weight	15,900 kg
	Tumbler distance / Wheel base	2,615 mm
Conveyor system	Crawler width	284 mm
	Tires	—
Auger system	Width x No. of line	400 mm x 2
	Rotating speed	0~15.9 m/min
Screed system	Auger dimensions	330 dia. x 300 pitch mm
	Rotating speed	0~82 min ⁻¹
Drive system	Model	J-Paver 2360
	Heating system	Electric
Engine	Compaction system	Tamper & Vibrator
	Type of driving method	Crawler (Track)
Engine	Drive method	HST
	Brake type	Automatic brake
Engine	Travelling speed (Forward / Backward)	0~3 / 0~3 km/h
	Make & Model	YANMAR-4TN107 (EU Stage V)
Engine	Displacement	4,567 cc (4 CYL.)
	Rated output	110/2,200 kW/min ⁻¹ (ECO MODE 108/2,000 kW/min ⁻¹)
Engine	Fuel tank capacity	180 L
		191 L

Equipment items

	HA60C-11	HA60W-11		HA60C-11	HA60W-11
Push roller	Oscillating push roller	○	Screed	Screed anti climb lock	○
	Hydraulic operated hopper front	○		Hydraulic center crown	○
Hopper	Individual operated wings (L&R)	○		Hydraulic height adjustment of extendable screed	○
	Hydraulic height adjustment (150 mm)	○		Hydraulic height adjustment of extendable mold board	○
Auger	Reversible auger	○		Auto. Tamper speed setting	○
	Left & right seat	○		Electric heating (3CH control)	○
Operator seat	Slide-out seat	○		Side plate heating (Electric)	●
	Seat heater (Under developing)	●		Hard top canopy (FRP) (Hydraulic operation)	○
Sensor	Grade & Slope sensor (Contact/Ultrasonic)	●		Emergency control system by hand pump	●
	Material flow controller (Auger rotation control)	●	Others	Auto greasing system (Inc. screed)	●
Hydraulic	Front wheel traction control	—		Crawler blade	●
	Brake steering	—		FVM (Field View Monitor) (3 cameras)	●
Hydraulic	Diff-lock system	—		Hopper camera (1 camera)	●
		—		Side window shield	○
		—		Front window shield (Under developing)	●
		—		AVS (Asphalt fume Ventilation System) (Under developing)	●

Dimensions

HA60C-11 [Crawler Type] (with optional equipment) (mm)

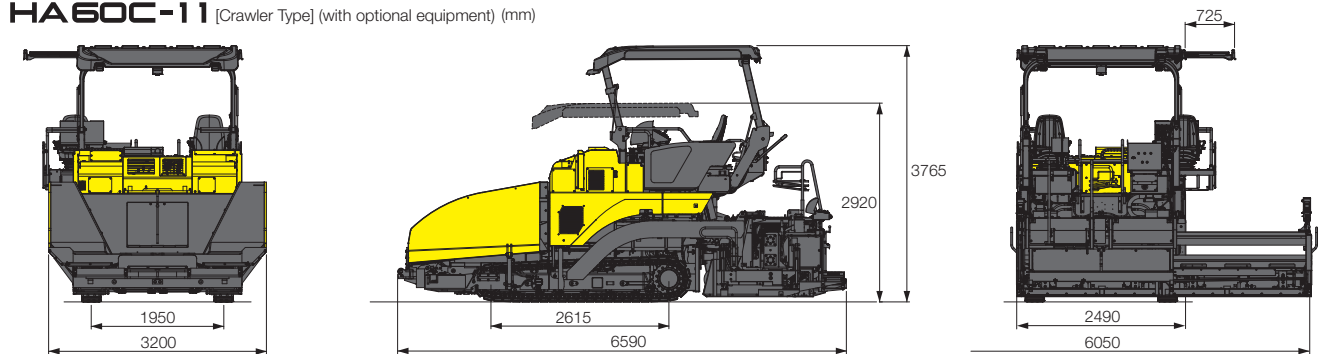

HA60W-11 [Wheel Type] (with optional equipment) (mm)

